

DFENSE BLOK™

Revolutionizing
Wear and Abrasion
Protection

4X better abrasion resistance
than competition*



Mining & Coal
Preparation




Pulp & Paper



Quarry &
Rock Products



Chemical Processing

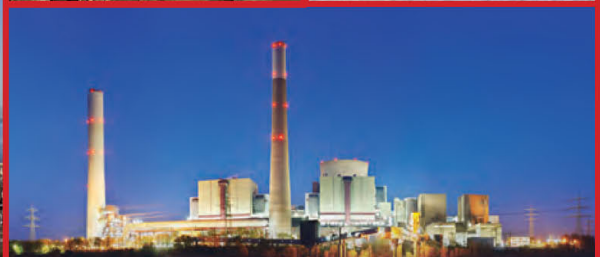

Coal-Fired Power Plants



Cement Processing



Water & Wastewater Treatment

Devcon®

DFENSE BLOK™

7X better drop impact strength than ceramic tile**

- Superior sliding abrasion resistance
- Withstands high impact conditions
- Less prone to unexpected fractures

Fast and easy to apply

- Non-sagging on:
 - Vertical surfaces at 3/4" thickness
 - Overhead surfaces at 1/2" thickness
- Functional Cure: 4 - 5 hours

Use DFense Blok™ Surface Wetting Agent for superior performance in the most severe conditions — 3X stronger than the competition***

- Zero wait time before applying DFense Blok™
- Allows superior adhesion to vertical and overhead surfaces
- Use in place of expanded metal
- Orange color for easy visual inspection



Order information

Description	Part Number	Size
DFense Blok™ Wearing Compound	11330	30 lbs.
DFense Blok™ Surface Wetting Agent	11340	1 lb.

To learn more about DFense Blok™ contact your local authorized ITW Devcon distributor today!

To find a distributor, visit www.devcon.com or call Technical Service 1-800-933-8266.

* Grit-blast abrasion testing at 40 psi, blasted with #14 silicon carbide at a 45° angle.

** Tested using 85 lb. weight with 0.25 sq. in. striking surface.

*** Testing per ASTM D 1002.

ITW Devcon.

30 Endicott Street
Danvers, MA 01923
www.devcon.com