



A Brand of ITW Devcon

30 Endicott St.  
Danvers, MA 01923 USA  
Telephone: 978-777-1100  
Toll Free: 800-933-8266

# Technical Data Sheet

## Medium Strength Threadlocker BLUE Gel

### PRODUCT DESCRIPTION

PERMATEX® Medium Strength Threadlocker BLUE Gel is a **medium strength** anaerobic threadlocking gel conveniently packaged in a new Gel Twist™ or Gel Squeeze™ applicator. The product, like its liquid counterpart, is a single component, anaerobic gel that cures when confined in the absence of air between close fitting metal surfaces, ideal for all 6mm to 25mm (1/4 inch to 1 inch) diameter threaded assemblies. Excellent chemical resistance and temperature resistance range of -54°C to +149°C (-65°F to +300°F). The assembly is easily removable with hand tools for servicing requirements. NSF White Book registered.

### PRODUCT BENEFITS

#### Improved Reliability

- Eliminates vibration loosening
- Seals against leakage
- Prevents rusting of threads
- Designed for use on vertical or hard-to-reach applications
- Cures without cracking or shrinking
- Adjusts or disassembles with hand tools

#### Easy Application

- No mess Gel Twist™ or Gel Squeeze™ applicator
- Gel-type product does not drip when applied
- Single component
- No curing outside of joint
- Thixotropic: resists dripping from threads during assembly
- No torque compensation required during assembly

### TYPICAL APPLICATIONS

Prevents loosening and reliably locks and seals all threaded fastener assemblies 6mm to 25mm (1/4" to 1") where service removability is important.

### DIRECTIONS FOR USE

#### For Assembly (Gel Twist™)

1. Clean all threads (bolt and hole) with a cleaning solvent such as Permatex® Brake & Parts Cleaner and allow to dry.
2. Remove the translucent protective cap by pulling off at an angle.
3. Turn the dial on the bottom of the container until 3mm to 6mm (1/8" to 1/4") of material protrudes from the top of the application tip. Note: First time use may require 4 to 5 full turns of the dial before material appears in the tip.
4. Apply threadlocker to the engagement area of the male fitting (usually the leading 5 to 6 threads).
5. Assemble parts and tighten to recommended torque (60% of recommended dry torque).
6. If unused gel contacts metal threads, do not retract threadlocker back into the tube. Wipe off with a clean towel.
7. Replace protective cap.

#### For Assembly (Gel Squeeze™)

1. Clean all threads (bolt and hole) with a cleaning solvent such as Permatex® Brake & Parts Cleaner.

2. Unscrew protective cap.
3. Gently squeeze tube to expose 3mm to 6mm (1/8" to 1/4") of material beyond tip.
4. Apply threadlocker to the engagement area of the male fitting (usually the leading 5 to 6 threads).
5. Assemble parts and tighten to recommended torque (60% of recommended dry torque).
6. If unused gel contacts metal threads, wipe off with a clean towel.
7. Replace protective cap.

#### For Cleanup

1. Residual liquid films and/or fillets outside the joint are readily soluble in Permatex® Brake & Parts Cleaner.
2. Cured product can be removed with a combination of soaking in Permatex® Gasket Remover and mechanical abrasion such as a wire brush.

#### For Disassembly

1. Remove with standard hand tools.
2. In the rare instance where hand tools do not work, because of excessive engagement length, apply localized heat to nut or bolt to approximately 232°C (450°F). Disassemble while hot.

#### For Reassembly

1. Remove loose product from nut and bolt following cleanup procedure above.
2. Apply Permatex® Surface Prep Activator to all threads, regardless of metal type.
3. Assemble and tighten as usual.

### PROPERTIES OF UNCURED MATERIAL

	Typical Value
Chemical Type	Anaerobic Dimethacrylate Ester
Appearance	Opaque Blue Fluorescent Gel
Specific Gravity	1.15
Viscosity @ 25°C, cP	
Brookfield RVF, spindle #3, @ 20 RPM	Gel
Flash Point (TCC), °C (°F)	>93 (>200)

#### Cure speed vs. temperature

The rate of cure will depend on the ambient temperature. **Full cure** is attainable in 24 hours at room temperature, 22°C (72°F), or 1 hour at 93°C (200°F).

### PERFORMANCE OF CURED MATERIAL

(After 24 hr at 72°F on 3/8-16 steel Grade 2 Nuts and Grade 5 bolts)

Typical Value	Range

NOT FOR PRODUCT SPECIFICATIONS.

THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.


PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-87PERMATEX) 11/07

Breakaway Torque, Nm, (in.lbs)	13 (115)	8 to 17 (70 to 150)
Prevail Torque, Nm (in.lbs)	6 (53)	3 to 7 (25 to 60)

Where Breakaway Torque is the force required to initiate the fastener movement and Prevail Torque is the force required to disassemble the fastener once Breakaway Torque has occurred.

### TYPICAL CURING PERFORMANCE

The graph below shows the breakaway strength developed with time on 3/8" – 16 Grade 5 bolts and Grade 2 nuts for different materials.

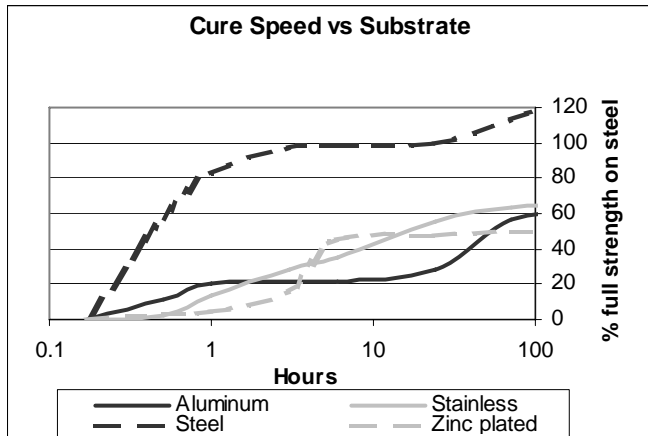

### TYPICAL ENVIRONMENTAL RESISTANCE

#### Temperature Resistance

Product temperature range from -54°C to +149°C (-65°F to +300°F). The breakaway and prevailing torque values decrease as temperature increases, however the assembly remains effective against vibration and leakage.

#### Chemical / Solvent Resistance

Aged under conditions and tested at 22°C(72°F)  
3/8-16 steel nuts & bolts  
% Initial Strength retained after time

	Temp °C(°F)	1000hr
Hot air	150(302)	47%
Motor oil (SL)	125(257)	21%

### GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

**Technical Data Sheet Medium Strength Threadlocker BLUE Gel**  
**For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).**

This product is not normally recommended for use on plastics (particularly thermoplastic materials where stress cracking of the plastic could result). It is recommended to confirm compatibility of the product with such substrates.

### ORDERING INFORMATION

Part Number	Container Size
24010	10 gm Gel Twist™ Applicator, carded
24005	5 gm Gel Squeeze™ Applicator, carded

### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.